

ONDULINE®

Roofing Sheets and accessories



INDIVIDUAL
&
COLLECTIVE
HOUSING



LEISURE
HOUSING



COMMERCIAL
BUILDINGS
AND RESORTS



PUBLIC-ACCESS
BUILDINGS



STORAGE
BUILDING



RENOVATION




LIGHTWEIGHT



FAST TO INSTALL



WATERPROOF



THERMAL-COMFORT



ACOUSTIC COMFORT



ECO-RESPONSIBLE




UNIVERSAL



REINFORCED
FOR
HOT CLIMATE



CARBON FOOTPRINT 4kg eq CO₂/m²



Accessories



**ONDULINE
RIDGE 2000**
Width: 48,5 cm
Length: 200 cm
Red - Brown - Green



VERGE
104 cm x 10,5 cm X h=11,4
Red - Brown - Green



MONOBLOCK NAILS
6 cm - 8 cm - 10 cm
Red - Brown - Green



UNIVERSAL SCREWS
7 cm - 10 cm
Red - Brown - Green
Diameter Ø: 3.90 mm
Drill capacity: 1.2 mm



**SELF DRILLING MONO-
BLOCK SCREWS**
6 cm - 10 cm
Red - Brown - Green
Diameter Ø: 4.75 mm
Drill capacity: 3 mm




FLASHING TAPE
Width: 30 cm
Length: 2,5 m
Red - Brown - Green





ONDUBAND PRO®
10 - 15 cm x 5 m
20 - 30 cm x 10 m
Red - Brown - Natural aluminium




ONDUCLAIR
Transparent polycarbonate
sheets for natural lighting covers
95 cm x 200 cm
Covering per sheet: 1,59 m²
Weight: 2,3 kg/sheet
Corrugation height: 4 cm
Number of corrugations: 10



ONDULINE ROOF SKYLIGHT
Width: 82,5 cm
Length: 66,5 cm
Black

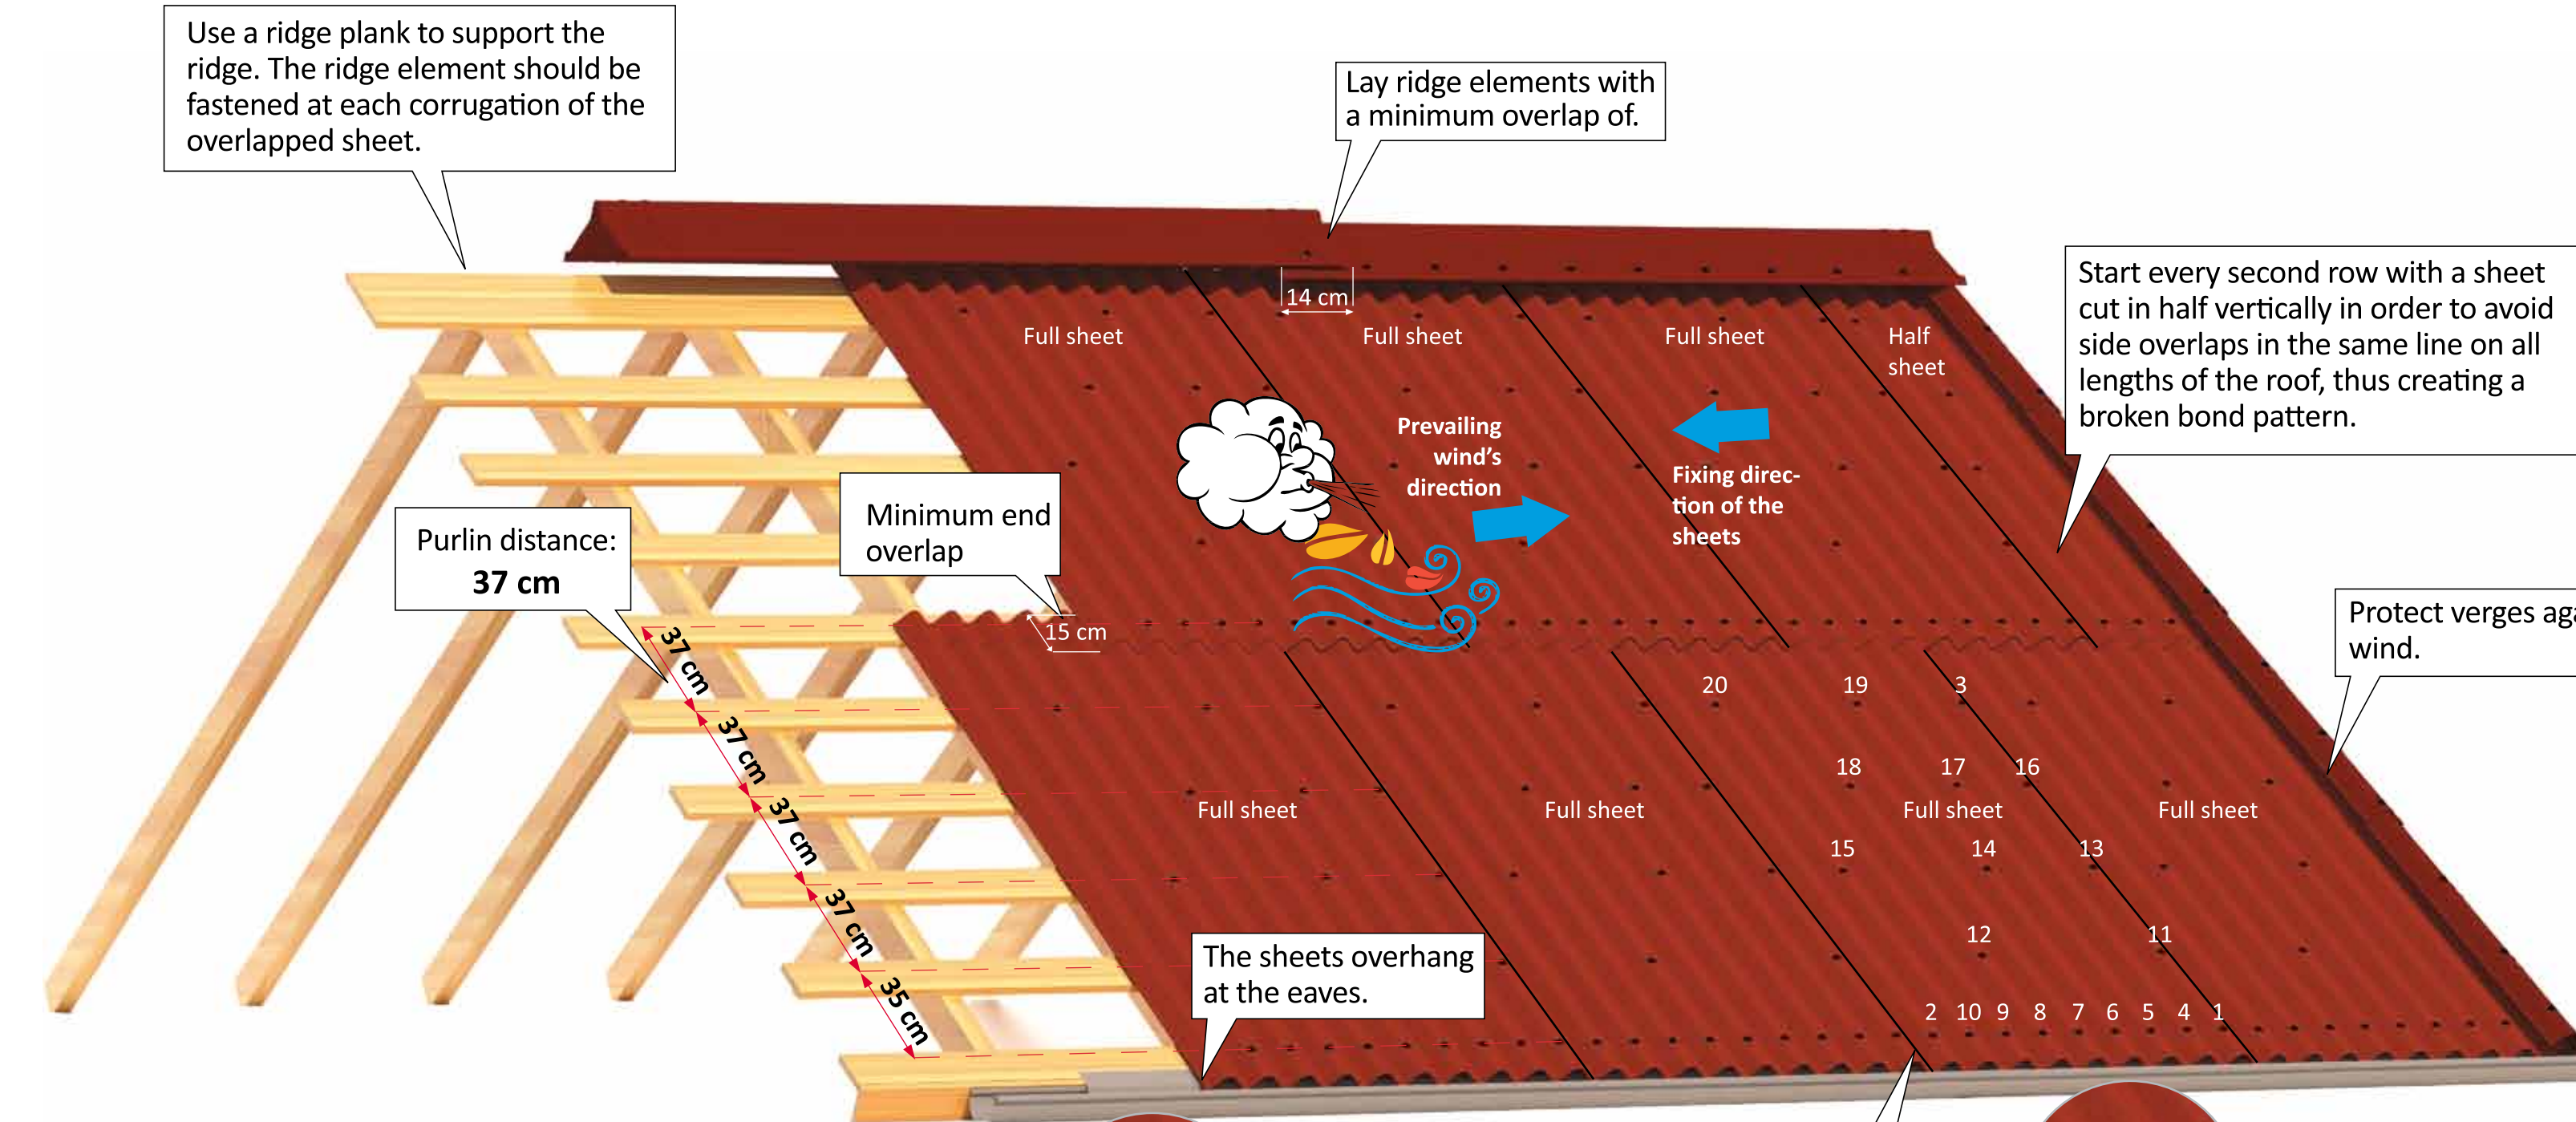


Onduline monoblock
nails (use minimum 20
nails per sheet)




Onduline self-drilling monoblock
screws or Universal screws (use
minimum 11 screws per sheet)

Use only genuine Onduline fixings . Every corrugation
should be fixed at eaves, overlaps and ridges. Fixing
should be done always through the top of the
corrugation.


Ridge

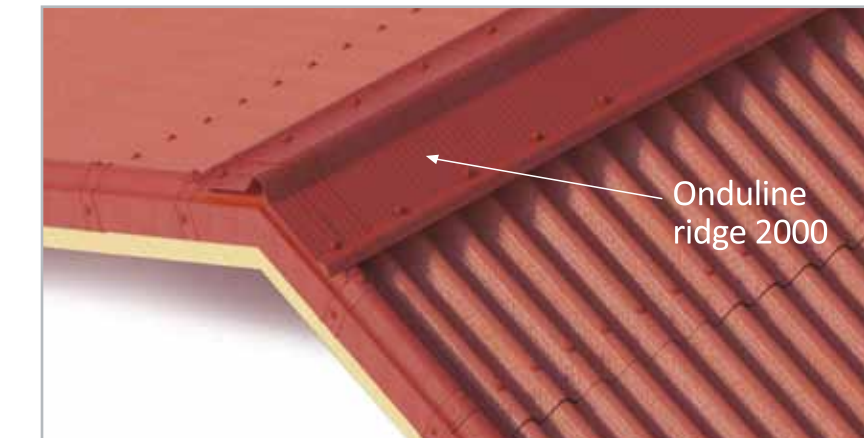

Hips

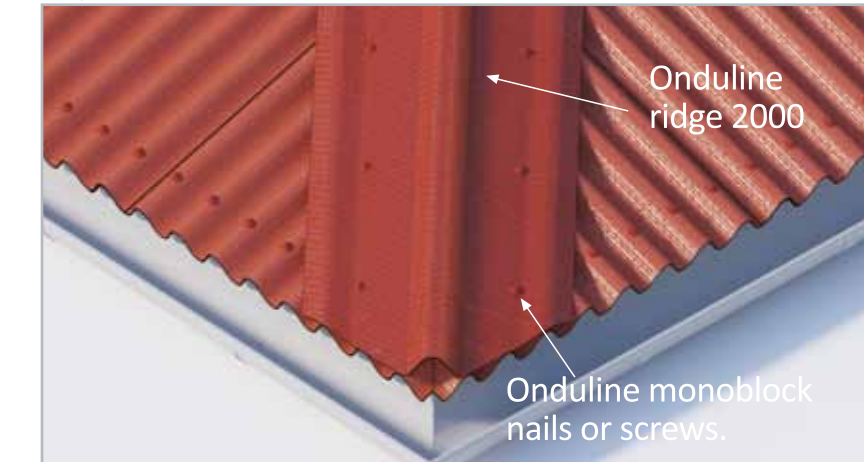

Verge

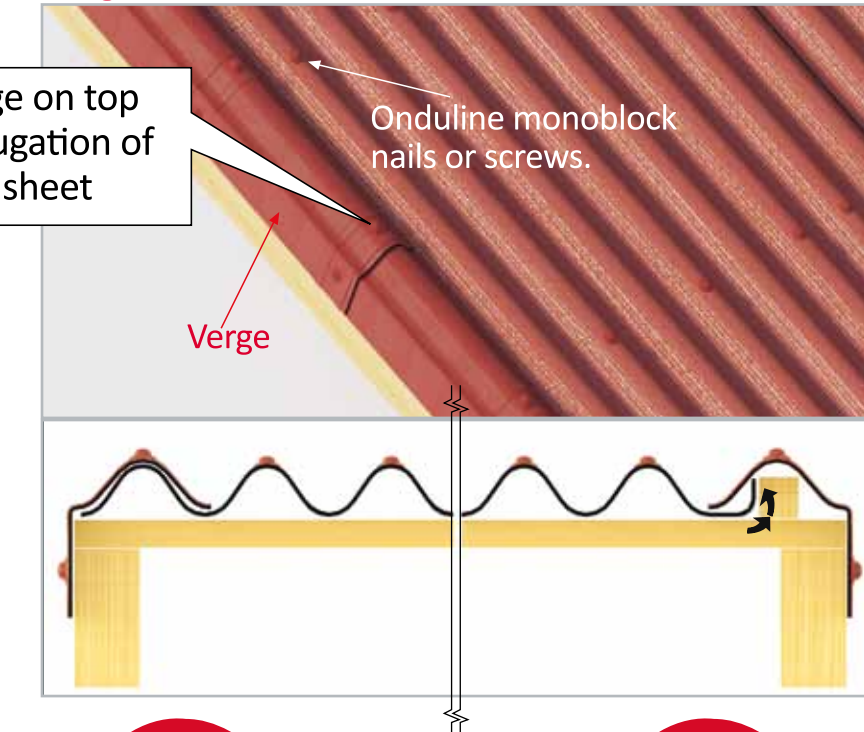


New ! Larger sheets and very easy to fix as usual

Made from most advanced technology, Onduline® sheets have a very low heat
conducting coefficients: they provide a perfect seal integrity in all climates and
insulate against the noise of heavy rainfall.
Lightweight and flexible, Onduline® sheets are specified by many architects in
regions of the world exposed to the risk of hurricanes.

Length / sheet	200 cm	Weight / sheet	6,5 kg (±10%)
Width / sheet	97 cm	Height of corrugations	38 mm
Net cover / sheet	1.61 m ²	Number of corrugations per sheet	10

**1 piece= 1,61 m²(net covered surface)
+ 20 pieces**

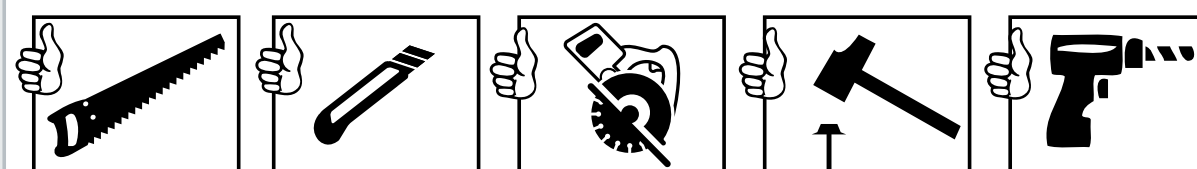

The slope must be minimum of
15 cm = 15% (8,53°)

Onduline®



For further information please visit our web site

www.onduline.com.tr

export@onduline.com.tr